



BUILDING DOUBLE WIDE TRESTLE BENTS

Use top cap for alignment only.
Do not glue in place.

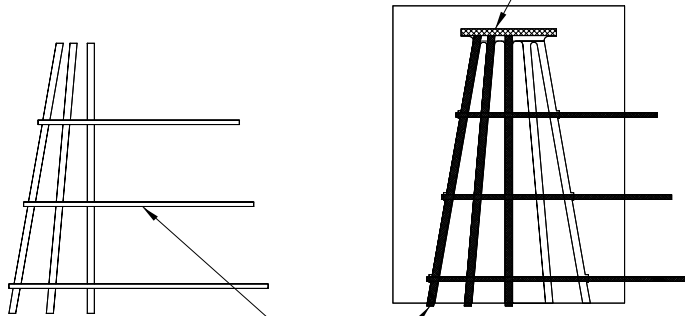


① Build two partial bent assemblies as shown.

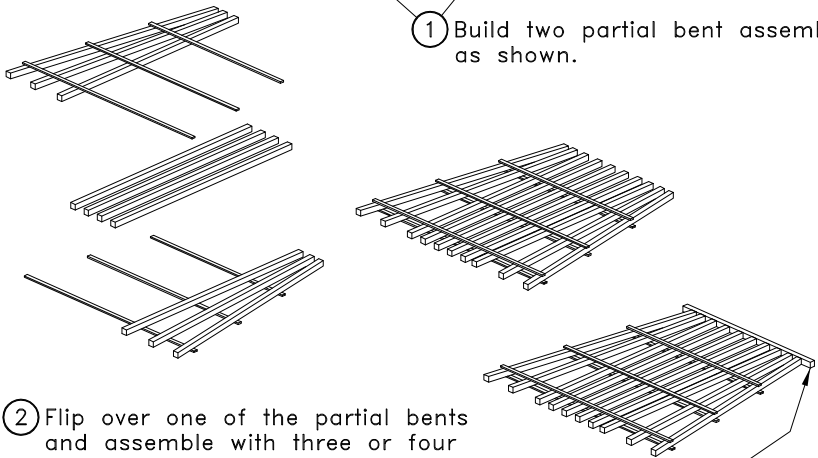

② Flip over one of the partial bents and assemble with three or four additional vertical supports. Use the full size drawing above. Adjust the spacing if required for curved trestle.

③ Add trestle cap that spans entire width.

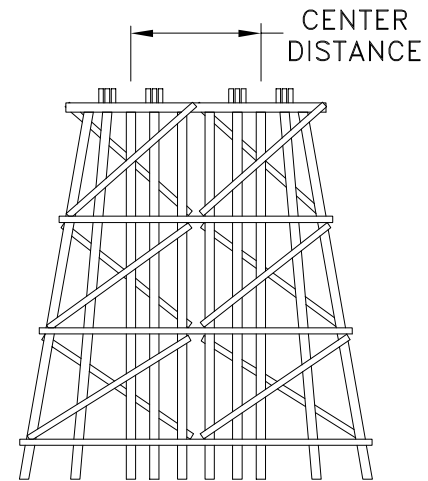

MINIMUM TRACK CENTER DISTANCE NMRA RECOMMENDATION – N SCALE

STRAIGHT, PARALLEL TRACK

STANDARD GAUGE 1-1/32"

NARROW GAUGE NONE SPECIFIED

10" RADIUS

STANDARD GAUGE 1-1/4"

NARROW GAUGE NONE SPECIFIED

ADDITIONAL RADII SPECIFIED IN NMRA STANDARDS, SHEET NO. S-8, AUGUST, 1982.

DRAWING SIZE

B

"N" SCALE TRESTLE

SHEET 3 OF 3



Black Bear Construction Co.
PO Box 26911 Austin, Texas 78755-0911
(512) 467-8400 FAX: (512) 458-8765

DRAWING SCALE 1:1

© 1994-95 Black Bear Construction Co.