




# BUILDING DOUBLE WIDE TRESTLE BENTS

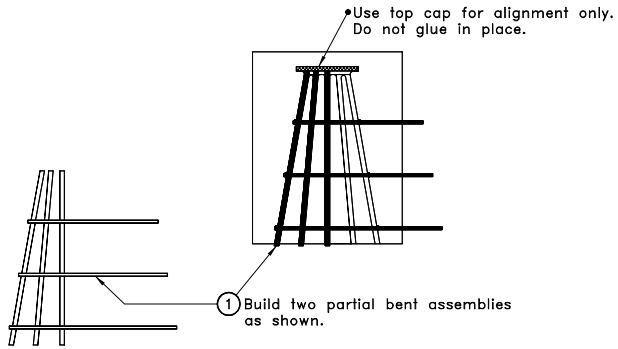


MINIMUM TRACK CENTER DISTANCE	
NMRA RECOMMENDATION - S SCALE	
STRAIGHT, PARALLEL TRACK	
STANDARD GAUGE	2-7/16"
NARROW GAUGE	2-1/16"
25" RADIUS	
STANDARD GAUGE	3"
NARROW GAUGE	2-3/4"
<small>ADDITIONAL RADII SPECIFIED IN NMRA STANDARDS, SHEET NO. S-8, AUGUST, 1982.</small>	

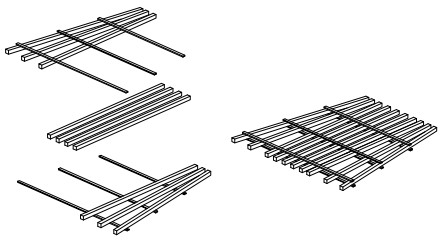


2 Flip over one of the partial bents and assemble with three or four additional vertical supports. Use the full size drawing above. Adjust the spacing if required for curved trestle.



3 Add trestle cap that spans entire width.

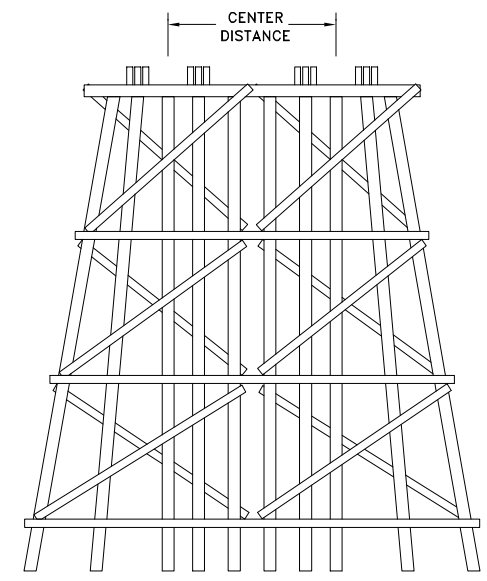

DOUBLE TRACK TRESTLE - STANDARD GAUGE  
FULL SIZE - S SCALE

DRAWING SIZE	"S" SCALE TRESTLE
D	
SHEET 2 OF 2	 <b>Black Bear Construction Co.</b> PO Box 26911 (512) 467-8400 Austin, Texas 78755-0911 FAX: (512) 458-8765
DRAWING SCALE 1:1	© 1994-95 Black Bear Construction Co.